

# A theoretical analysis of one-dimensional discrete generation ensemble Kalman particle filters

Emma Horton<sup>1</sup>  
University of Warwick

Algorithms and Computationally Intensive Inference Seminars  
8 March 2024


---

<sup>1</sup>Joint work with Pierre Del Moral (Inria, Bordeaux)

## 1 The Kalman filter

## 2 Ensemble Kalman filter (EnKF)


# Motivating example: target tracking

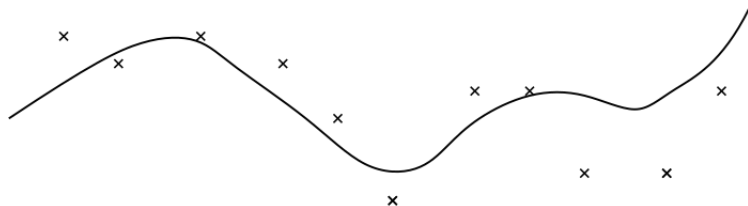

x Noisy measurements

— Path of target

# Motivating example: target tracking

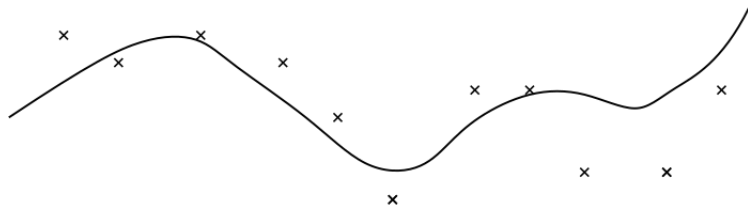


x Noisy measurements


— Path of target

~> What is the best way to combine the model and measurements to estimate the path of the target?

# Motivating example: radiotherapy

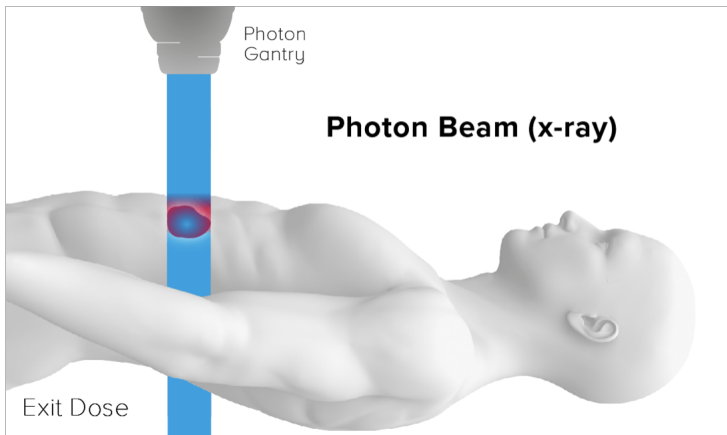

# Motivating example: radiotherapy

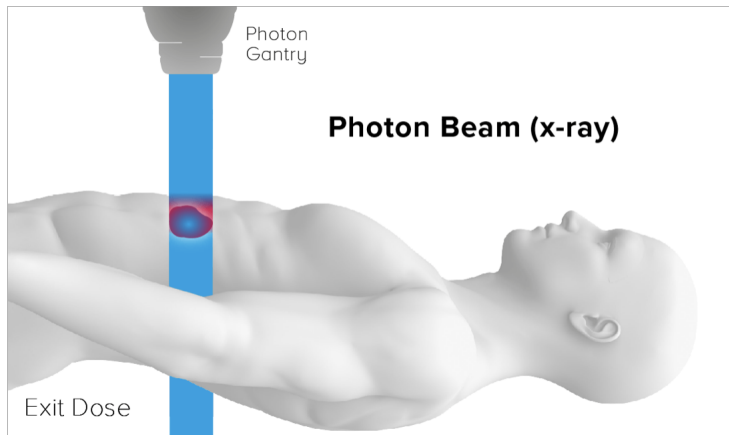

~> What is the best way to combine the model and measurements to estimate the dose?

# The problem

Consider the following one-dimensional model,

$$X_{n+1} = AX_n + BW_{n+1}, \quad n \geq 1,$$

with noisy measurements

$$Y_n = CX_n + DV_n, \quad n \geq 0,$$

where

- $X_0 \sim \mathcal{N}(\hat{X}_0^-, \hat{P}_0^-)$ ,
- $V_n, W_{n+1} \sim \mathcal{N}(0, 1)$  are independent,
- $A, B, C, D \neq 0$ .

# The problem

Consider the following one-dimensional model,

$$X_{n+1} = AX_n + BW_{n+1}, \quad n \geq 1,$$

with noisy measurements

$$Y_n = CX_n + DV_n, \quad n \geq 0,$$

where

- $X_0 \sim \mathcal{N}(\hat{X}_0^-, \hat{P}_0^-)$ ,
- $V_n, W_{n+1} \sim \mathcal{N}(0, 1)$  are independent,
- $A, B, C, D \neq 0$ .

↪ Aim: to compute the distribution of  $X_n$  given the measurements,  $Y_0, \dots, Y_n$ .



# Some observations

- Write  $x_{0:n}$  for the tuple  $(x_0, \dots, x_n)$  and similarly for  $y$ .
- From Bayes' rule, the Markov property and the fact that the errors are independent, we have

$$p(x_{0:n}|y_{0:n}) \propto p(y_{0:n}|x_{0:n})p(x_{0:n})$$

# Some observations

- Write  $x_{0:n}$  for the tuple  $(x_0, \dots, x_n)$  and similarly for  $y$ .
- From Bayes' rule, the Markov property and the fact that the errors are independent, we have

$$\begin{aligned} p(x_{0:n}|y_{0:n}) &\propto p(y_{0:n}|x_{0:n})p(x_{0:n}) \\ &= \prod_{k=0}^n p(y_k|x_k)p(x_0) \prod_{k=1}^n p(x_k|x_{k-1}) \end{aligned}$$

# Some observations

- Write  $x_{0:n}$  for the tuple  $(x_0, \dots, x_n)$  and similarly for  $y$ .
- From Bayes' rule, the Markov property and the fact that the errors are independent, we have

$$\begin{aligned} p(x_{0:n}|y_{0:n}) &\propto p(y_{0:n}|x_{0:n})p(x_{0:n}) \\ &= \prod_{k=0}^n p(y_k|x_k)p(x_0) \prod_{k=1}^n p(x_k|x_{k-1}) \\ &= p(x_0)p(y_0|x_0) \prod_{k=1}^n p(y_k|x_k)p(x_k|x_{k-1}) \end{aligned}$$

# Some observations

- Write  $x_{0:n}$  for the tuple  $(x_0, \dots, x_n)$  and similarly for  $y$ .
- From Bayes' rule, the Markov property and the fact that the errors are independent, we have

$$\begin{aligned} p(x_{0:n}|y_{0:n}) &\propto p(y_{0:n}|x_{0:n})p(x_{0:n}) \\ &= \prod_{k=0}^n p(y_k|x_k)p(x_0) \prod_{k=1}^n p(x_k|x_{k-1}) \\ &= p(x_0)p(y_0|x_0) \prod_{k=1}^n p(y_k|x_k)p(x_k|x_{k-1}) \\ &= p(x_0)p(y_0 - Cx_0) \prod_{k=1}^n p(y_k - Cx_k)p(x_k|x_{k-1}) \end{aligned}$$

# Some observations

- Recall that  $X_0 \sim \mathcal{N}(\hat{X}_0^-, \hat{P}_0^-)$  and the model

$$\begin{aligned}Y_n &= CX_n + DV_n, \\X_{n+1} &= AX_n + BW_{n+1},\end{aligned}$$

- Then  $X_n | \mathcal{Y}_{n-1} \sim \mathcal{N}(\hat{X}_n^-, \hat{P}_n^-)$ , where

$$\hat{X}_n^- = \mathbb{E}[X_n | \mathcal{Y}_{n-1}], \quad \hat{P}_n^- = \mathbb{E}[(X_n - \hat{X}_n^-)^2].$$

- Similarly  $X_n | \mathcal{Y}_n \sim \mathcal{N}(\hat{X}_n, \hat{P}_n)$ , where

$$\hat{X}_n = \mathbb{E}[X_n | \mathcal{Y}_n], \quad \hat{P}_n = \mathbb{E}[(X_n - \hat{X}_n)^2].$$

- $\rightsquigarrow$  Just need to know how to calculate the mean and covariance.

# Some observations

- Recall that  $X_0 \sim \mathcal{N}(\hat{X}_0^-, \hat{P}_0^-)$  and the model

$$\begin{aligned}Y_n &= CX_n + DV_n, \\X_{n+1} &= AX_n + BW_{n+1},\end{aligned}$$

- Then  $X_n | \mathcal{Y}_{n-1} \sim \mathcal{N}(\hat{X}_n^-, \hat{P}_n^-)$ , where

$$\hat{X}_n^- = \mathbb{E}[X_n | \mathcal{Y}_{n-1}], \quad \hat{P}_n^- = \mathbb{E}[(X_n - \hat{X}_n^-)^2].$$

- Similarly  $X_n | \mathcal{Y}_n \sim \mathcal{N}(\hat{X}_n, \hat{P}_n)$ , where

$$\hat{X}_n = \mathbb{E}[X_n | \mathcal{Y}_n], \quad \hat{P}_n = \mathbb{E}[(X_n - \hat{X}_n)^2].$$

- $\rightsquigarrow$  Just need to know how to calculate the mean and covariance.

# Some observations

- Recall that  $X_0 \sim \mathcal{N}(\hat{X}_0^-, \hat{P}_0^-)$  and the model

$$\begin{aligned}Y_n &= CX_n + DV_n, \\X_{n+1} &= AX_n + BW_{n+1},\end{aligned}$$

- Then  $X_n | \mathcal{Y}_{n-1} \sim \mathcal{N}(\hat{X}_n^-, \hat{P}_n^-)$ , where

$$\hat{X}_n^- = \mathbb{E}[X_n | \mathcal{Y}_{n-1}], \quad \hat{P}_n^- = \mathbb{E}[(X_n - \hat{X}_n^-)^2].$$

- Similarly  $X_n | \mathcal{Y}_n \sim \mathcal{N}(\hat{X}_n, \hat{P}_n)$ , where

$$\hat{X}_n = \mathbb{E}[X_n | \mathcal{Y}_n], \quad \hat{P}_n = \mathbb{E}[(X_n - \hat{X}_n)^2].$$

- $\rightsquigarrow$  Just need to know how to calculate the mean and covariance.

# The Kalman filter

The Kalman filter consists of two steps (update and predict)

$$(\hat{X}_n^-, \hat{P}_n^-) \longrightarrow (\hat{X}_n, \hat{P}_n) \longrightarrow (\hat{X}_{n+1}^-, \hat{P}_{n+1}^-).$$

## 1 Update

$$\hat{X}_n = (1 - G_n C) \hat{X}_n^- + G_n Y_n = \hat{X}_n^- + G_n (Y_n - C \hat{X}_n^-)$$

$$\hat{P}_n = (1 - G_n C) \hat{P}_n^-,$$

where  $G_n = C \hat{P}_n^- (C^2 \hat{P}_n^- + D^2)^{-1}$ .

## 2 Predict

$$\hat{X}_{n+1}^- = A \hat{X}_n$$

$$\hat{P}_{n+1}^- = A^2 \hat{P}_n + B^2.$$



# The Kalman filter

The Kalman filter consists of two steps (update and predict)

$$(\hat{X}_n^-, \hat{P}_n^-) \longrightarrow (\hat{X}_n, \hat{P}_n) \longrightarrow (\hat{X}_{n+1}^-, \hat{P}_{n+1}^-).$$

## 1 Update

$$\hat{X}_n = (1 - G_n C) \hat{X}_n^- + G_n Y_n = \hat{X}_n^- + G_n (Y_n - C \hat{X}_n^-)$$

$$\hat{P}_n = (1 - G_n C) \hat{P}_n^-,$$


where  $G_n = C \hat{P}_n^- (C^2 \hat{P}_n^- + D^2)^{-1}$ .

## 2 Predict

$$\hat{X}_{n+1}^- = A \hat{X}_n$$

$$\hat{P}_{n+1}^- = A^2 \hat{P}_n + B^2.$$

# The Kalman filter

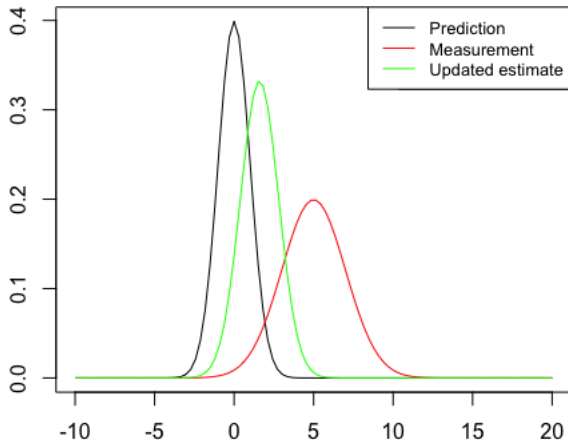

# The Kalman gain

- The quantity

$$G_n = C\hat{P}_n^-(C^2\hat{P}_n^- + D^2)^{-1}$$

is called the Kalman gain.

- It represents the relative importance of the errors  $Y_n - C\hat{X}_n^-$  with respect to the prior estimate  $\hat{X}_n^-$ .

- As  $D \rightarrow 0$ ,  $G_n \rightarrow C^{-1}$  and the update step becomes

$$\hat{X}_n = \hat{X}_n^- + C^{-1}(Y_n - C\hat{X}_n^-) = C^{-1}Y_n.$$

- As  $\hat{P}_n^- \rightarrow 0$ ,  $G_n \rightarrow 0$  and the update step converges to  $\hat{X}_n = \hat{X}_n^-$ .

# The Kalman gain

- The quantity

$$G_n = C\hat{P}_n^-(C^2\hat{P}_n^- + D^2)^{-1}$$

is called the Kalman gain.

- It represents the relative importance of the errors  $Y_n - C\hat{X}_n^-$  with respect to the prior estimate  $\hat{X}_n^-$ .

- As  $D \rightarrow 0$ ,  $G_n \rightarrow C^{-1}$  and the update step becomes

$$\hat{X}_n = \hat{X}_n^- + C^{-1}(Y_n - C\hat{X}_n^-) = C^{-1}Y_n.$$

- As  $\hat{P}_n^- \rightarrow 0$ ,  $G_n \rightarrow 0$  and the update step converges to  $\hat{X}_n = \hat{X}_n^-$ .

# The Kalman gain

- The quantity

$$G_n = C\hat{P}_n^-(C^2\hat{P}_n^- + D^2)^{-1}$$

is called the Kalman gain.

- It represents the relative importance of the errors  $Y_n - C\hat{X}_n^-$  with respect to the prior estimate  $\hat{X}_n^-$ .

- As  $D \rightarrow 0$ ,  $G_n \rightarrow C^{-1}$  and the update step becomes

$$\hat{X}_n = \hat{X}_n^- + C^{-1}(Y_n - C\hat{X}_n^-) = C^{-1}Y_n.$$

- As  $\hat{P}_n^- \rightarrow 0$ ,  $G_n \rightarrow 0$  and the update step converges to  $\hat{X}_n = \hat{X}_n^-$ .

# Properties of the Kalman filter

- The Kalman filter BLUE.
- Best = the estimator that minimises the MSE amongst all unbiased linear estimators.
- To prove this, consider the following estimator

$$\hat{X}_n = H_n \hat{X}_n^- + G_n Y_n.$$

# The Kalman filter is BLUE: unbiasedness

Consider the bias

$$\mathbb{E}[\hat{X}_n - X_n] = \mathbb{E}[H_n \hat{X}_n^- + G_n Y_n - X_n]$$

# The Kalman filter is BLUE: unbiasedness

Consider the bias

$$\begin{aligned}\mathbb{E}[\hat{X}_n - X_n] &= \mathbb{E}[H_n \hat{X}_n^- + G_n Y_n - X_n] \\ &= \mathbb{E}[H_n(X_n + \hat{X}_n^- - X_n) + G_n(CX_n + DV_n) - X_n]\end{aligned}$$



# The Kalman filter is BLUE: unbiasedness

Consider the bias

$$\begin{aligned}\mathbb{E}[\hat{X}_n - X_n] &= \mathbb{E}[H_n \hat{X}_n^- + G_n Y_n - X_n] \\ &= \mathbb{E}[H_n(X_n + \hat{X}_n^- - X_n) + G_n(CX_n + DV_n) - X_n] \\ &= (G_n C + H_n - 1)\mathbb{E}[X_n] + G_n D\mathbb{E}[V_n] + H_n\mathbb{E}[\hat{X}_n^- - X_n]\end{aligned}$$

# The Kalman filter is BLUE: unbiasedness

Consider the bias

$$\begin{aligned}\mathbb{E}[\hat{X}_n - X_n] &= \mathbb{E}[H_n \hat{X}_n^- + G_n Y_n - X_n] \\ &= \mathbb{E}[H_n(X_n + \hat{X}_n^- - X_n) + G_n(CX_n + DV_n) - X_n] \\ &= (G_n C + H_n - 1)\mathbb{E}[X_n] + G_n D\mathbb{E}[V_n] + H_n\mathbb{E}[\hat{X}_n^- - X_n] \\ &= (G_n C + H_n - 1)\mathbb{E}[X_n] + G_n D\mathbb{E}[V_n] + H_n A\mathbb{E}[\hat{X}_{n-1} - X_{n-1}] \\ &\quad - H_n B\mathbb{E}[W_n].\end{aligned}$$

# The Kalman filter is BLUE: unbiasedness

Consider the bias

$$\begin{aligned}\mathbb{E}[\hat{X}_n - X_n] &= \mathbb{E}[H_n \hat{X}_n^- + G_n Y_n - X_n] \\ &= \mathbb{E}[H_n(X_n + \hat{X}_n^- - X_n) + G_n(CX_n + DV_n) - X_n] \\ &= (G_n C + H_n - 1)\mathbb{E}[X_n] + G_n D\mathbb{E}[V_n] + H_n\mathbb{E}[\hat{X}_n^- - X_n] \\ &= (G_n C + H_n - 1)\mathbb{E}[X_n] + G_n D\mathbb{E}[V_n] + H_n A\mathbb{E}[\hat{X}_{n-1} - X_{n-1}] \\ &\quad - H_n B\mathbb{E}[W_n].\end{aligned}$$

In order for the estimator to be unbiased, need

$$H_n = (1 - G_n C),$$

which yields

$$\hat{X}_n := \hat{X}_n^- + G_n(Y_n - C\hat{X}_n^-).$$

# The Kalman filter is BLUE: optimality

First note that

$$\begin{aligned}(X_n - \hat{X}_n)^2 &= (X_n - \hat{X}_n^- - G_n(Y_n - C\hat{X}_n^-))^2 \\ &= [(1 - G_n C)(X_n - \hat{X}_n^-) - G_n D V_n]^2.\end{aligned}$$

# The Kalman filter is BLUE: optimality

First note that

$$\begin{aligned}(X_n - \hat{X}_n)^2 &= (X_n - \hat{X}_n^- - G_n(Y_n - C\hat{X}_n^-))^2 \\ &= [(1 - G_n C)(X_n - \hat{X}_n^-) - G_n D V_n]^2.\end{aligned}$$

Expanding and taking expectations yields

$$\hat{P}_n = (1 - G_n C)^2 \hat{P}_n^- + G_n^2 D^2.$$

# The Kalman filter is BLUE: optimality

First note that

$$\begin{aligned}(X_n - \hat{X}_n)^2 &= (X_n - \hat{X}_n^- - G_n(Y_n - C\hat{X}_n^-))^2 \\ &= [(1 - G_n C)(X_n - \hat{X}_n^-) - G_n D V_n]^2.\end{aligned}$$

Expanding and taking expectations yields

$$\hat{P}_n = (1 - G_n C)^2 \hat{P}_n^- + G_n^2 D^2.$$

Minimise w.r.t.  $G_n$ :

$$0 = \frac{\partial}{\partial G_n} \hat{P}_n = -2C(1 - G_n C) \hat{P}_n^- + 2D^2 G_n,$$

# The Kalman filter is BLUE: optimality

First note that

$$\begin{aligned}(X_n - \hat{X}_n)^2 &= (X_n - \hat{X}_n^- - G_n(Y_n - C\hat{X}_n^-))^2 \\ &= [(1 - G_n C)(X_n - \hat{X}_n^-) - G_n D V_n]^2.\end{aligned}$$

Expanding and taking expectations yields

$$\hat{P}_n = (1 - G_n C)^2 \hat{P}_n^- + G_n^2 D^2.$$

Minimise w.r.t.  $G_n$ :

$$0 = \frac{\partial}{\partial G_n} \hat{P}_n = -2C(1 - G_n C)\hat{P}_n^- + 2D^2 G_n,$$

which implies

$$G_n = C\hat{P}_n^- (C\hat{P}_n^- + D^2)^{-1}.$$

# Stability of the Kalman filter

- We may write

$$X_{n+1} - \hat{X}_{n+1}^- = A(1 - G_n C)(X_n - \hat{X}_n^-) + BW_{n+1} - AG_n DV_n.$$

- Can't hope to obtain a result of the form  $\|X_n - \hat{X}_n^-\| \rightarrow 0$  unless the measurement noise vanishes.
- However, we can study the homogeneous part of the above recursion:

$$Z_{n+1} = A(1 - G_n C)Z_n \tag{1}$$



# Stability of the Kalman filter

- We may write

$$X_{n+1} - \hat{X}_{n+1}^- = A(1 - G_n C)(X_n - \hat{X}_n^-) + BW_{n+1} - AG_n DV_n.$$

- Can't hope to obtain a result of the form  $\|X_n - \hat{X}_n^-\| \rightarrow 0$  unless the measurement noise vanishes.
- However, we can study the homogeneous part of the above recursion:

$$Z_{n+1} = A(1 - G_n C)Z_n \tag{1}$$

# Stability of the Kalman filter

- We may write

$$X_{n+1} - \hat{X}_{n+1}^- = A(1 - G_n C)(X_n - \hat{X}_n^-) + BW_{n+1} - AG_n DV_n.$$

- Can't hope to obtain a result of the form  $\|X_n - \hat{X}_n^-\| \rightarrow 0$  unless the measurement noise vanishes.
- However, we can study the homogeneous part of the above recursion:

$$Z_{n+1} = A(1 - G_n C)Z_n \tag{1}$$

# Stability of the Kalman filter

- We may write

$$X_{n+1} - \hat{X}_{n+1}^- = A(1 - G_n C)(X_n - \hat{X}_n^-) + BW_{n+1} - AG_n DV_n.$$

- Can't hope to obtain a result of the form  $\|X_n - \hat{X}_n^-\| \rightarrow 0$  unless the measurement noise vanishes.
- However, we can study the homogeneous part of the above recursion:

$$Z_{n+1} = A(1 - G_n C)Z_n \tag{1}$$

# Stability of the Kalman filter

## Theorem (Deyst & Price '68, Jazwinski '70)

If  $A, B, C, D \neq 0$  and  $\hat{P}_0^- > 0$  then there exist constants  $K > 0$ ,  $\gamma \in (0, 1)$ ,  $n_0 \geq 0$  such that

$$\|Z_n\| \leq K\gamma^{n-n_0}\|Z_{n_0}\|.$$

# Stability of the Kalman filter

## Theorem (Deyst & Price '68, Jazwinski '70)

If  $A, B, C, D \neq 0$  and  $\hat{P}_0^- > 0$  then there exist constants  $K > 0$ ,  $\gamma \in (0, 1)$ ,  $n_0 \geq 0$  such that

$$\|Z_n\| \leq K\gamma^{n-n_0}\|Z_{n_0}\|.$$

Many criteria for proving exponential stability but we will focus on Lyapunov-type criteria.

## Lyapunov Stability Theorem

The system (1) is exponentially stable if there exists a continuous scalar function such that

- $V(0) = 0$  and  $V(x) > 0$  for  $x \neq 0$ ,
  - $V(x) \rightarrow \infty$  as  $\|x\| \rightarrow \infty$ , and
  - $V(Z_{n+1}) - V(Z_n) \leq 0$ .
- 
- A Lyapunov function is a non-negative function of a system's state that decreases as the state changes.
  - If a system is described by a set of differential equations and we can find a Lyapunov function for these equations, then local minima of the Lyapunov function are stable.
  - A Lyapunov function  $V$  is an analogue of the energy of a physical system.

## Lyapunov Stability Theorem

The system (1) is exponentially stable if there exists a continuous scalar function such that

- $V(0) = 0$  and  $V(x) > 0$  for  $x \neq 0$ ,
  - $V(x) \rightarrow \infty$  as  $\|x\| \rightarrow \infty$ , and
  - $V(Z_{n+1}) - V(Z_n) \leq 0$ .
- 
- A Lyapunov function is a non-negative function of a system's state that decreases as the state changes.
  - If a system is described by a set of differential equations and we can find a Lyapunov function for these equations, then local minima of the Lyapunov function are stable.
  - A Lyapunov function  $V$  is an analogue of the energy of a physical system.

# Stability of the Kalman filter

- What about the covariance?

- We have the following recursion for  $\hat{P}_n^-$

$$\hat{P}_{n+1}^- = A^2(1 - G_n C)\hat{P}_n^- + B^2$$

- Again, we can't hope for a result of the form  $\|\hat{P}_n^-\| \rightarrow 0$ .



# Stability of the Kalman filter

- What about the covariance?
- We have the following recursion for  $\hat{P}_n^-$

$$\hat{P}_{n+1}^- = A^2(1 - G_n C) \hat{P}_n^- + B^2$$

- Again, we can't hope for a result of the form  $\|\hat{P}_n^-\| \rightarrow 0$ .

# Stability of the Kalman filter

- What about the covariance?
- We have the following recursion for  $\hat{P}_n^-$

$$\hat{P}_{n+1}^- = A^2(1 - G_n C) \hat{P}_n^- + B^2$$

- Again, we can't hope for a result of the form  $\|\hat{P}_n^-\| \rightarrow 0$ .

# Stability of the Kalman filter

- What about the covariance?
- We have the following recursion for  $\hat{P}_n^-$

$$\hat{P}_{n+1}^- = A^2(1 - G_n C)\hat{P}_n^- + B^2$$

- Again, we can't hope for a result of the form  $\|\hat{P}_n^-\| \rightarrow 0$ .

## Theorem (West & Harris '97)

For time-invariant systems, there exists  $P_\infty^- > 0$  such that

$$\|\hat{P}_n^- - P_\infty^-\| \rightarrow 0, \quad \text{as } n \rightarrow \infty.$$

In addition, there exists  $G_\infty$  such that

$$\|\hat{G}_n - G_\infty\| \rightarrow 0, \quad \text{as } n \rightarrow \infty.$$

# Riccati rational difference equation

- The evolution equation for  $\hat{P}_n^-$  can equivalently be written as

$$\hat{P}_{n+1}^- = \phi(\hat{P}_n^-) = \frac{a\hat{P}_n^- + b}{c\hat{P}_n^- + d},$$

where  $a, b, c, d$  are determined by  $A, B, C, D$ .

- The function  $\phi$  is known as a Riccati map and the above equation as a Riccati rational difference equation.
- More on these maps later...

# Riccati rational difference equation

- The evolution equation for  $\hat{P}_n^-$  can equivalently be written as

$$\hat{P}_{n+1}^- = \phi(\hat{P}_n^-) = \frac{a\hat{P}_n^- + b}{c\hat{P}_n^- + d},$$

where  $a, b, c, d$  are determined by  $A, B, C, D$ .

- The function  $\phi$  is known as a Riccati map and the above equation as a Riccati rational difference equation.
- More on these maps later...

# Riccati rational difference equation

- The evolution equation for  $\hat{P}_n^-$  can equivalently be written as

$$\hat{P}_{n+1}^- = \phi(\hat{P}_n^-) = \frac{a\hat{P}_n^- + b}{c\hat{P}_n^- + d},$$

where  $a, b, c, d$  are determined by  $A, B, C, D$ .

- The function  $\phi$  is known as a Riccati map and the above equation as a Riccati rational difference equation.
- More on these maps later...

# Stability of the Kalman filter

Let  $\hat{X}_n(x, p)$  denote the solution of the Kalman filter associated with the initial conditions  $(\hat{X}_0, \hat{P}_0) = (x, p)$ .

## Theorem (Del Moral, H., '22)

The Riccati equation  $\hat{P}_{n+1}^- = \phi(\hat{P}_n^-)$  has a unique positive fixed point,  $P_\infty^-$  and for any  $p = (p_1, p_2) \in \mathbb{R}^2$ , we have

$$|\phi^n(p_1) - \phi^n(p_2)| \leq C_1(1 - \varepsilon_1)^n |p_1 - p_2|.$$

In addition, there exists  $k(p_1) \in \mathbb{N}$  such that for any  $x = (x_1, x_2) \in \mathbb{R}^2$  we have

$$\mathbb{E} \left[ \left( \hat{X}_n(x_1, p_1) - \hat{X}_n(x_2, p_2) \right)^2 \right]^{\frac{1}{2}} \leq C(x, p)(1 - \varepsilon_2)^{n - k(p_1)} (|p_1 - p_2| + |x_1 - x_2|).$$

# Assumptions

- The parameters  $A, B, C, D$  are non-zero.
- The parameters  $A, B, C, D$  are independent of the time step.
- The source is Gaussian.
- The errors are Gaussian.
- The system is one-dimensional.



# Assumptions

Recall the original system:

$$\begin{aligned}Y_n &= CX_n + DV_n, \\X_{n+1} &= AX_n + BW_{n+1}.\end{aligned}$$

## Definition (Kalman '60)

The system is said to be observable if

$$[C, CA, CA^2, \dots, CA^{d-1}]^T$$

has rown rank  $d$ , where  $d$  is the dimension of the state space.

# Assumptions

Recall the original system:

$$\begin{aligned}Y_n &= CX_n + DV_n, \\X_{n+1} &= AX_n + BW_{n+1}.\end{aligned}$$

## Definition (Kalman '60)

The system is said to be observable if

$$[C, CA, CA^2, \dots, CA^{d-1}]^T$$

has rown rank  $d$ , where  $d$  is the dimension of the state space.

# Assumptions

- Observability says that any state  $x$  can be inferred from a sufficient number of observations.
- Suppose now the state space has dimension  $d$ , so that  $X_n \in \mathbb{R}^d$ , for example and consider the average behaviour of the system:

$$\begin{aligned} Y_n &= CX_n, \\ X_{n+1} &= AX_n. \end{aligned}$$

- If we knew  $X_0$ , then the second equation would give us complete knowledge of the state at any time  $n \rightsquigarrow$  just need to determine  $X_0$ .

# Assumptions

- Observability says that any state  $x$  can be inferred from a sufficient number of observations.
- Suppose now the state space has dimension  $d$ , so that  $X_n \in \mathbb{R}^d$ , for example and consider the average behaviour of the system:

$$\begin{aligned} Y_n &= CX_n, \\ X_{n+1} &= AX_n. \end{aligned}$$

- If we knew  $X_0$ , then the second equation would give us complete knowledge of the state at any time  $n \rightsquigarrow$  just need to determine  $X_0$ .

# Assumptions

- Observability says that any state  $x$  can be inferred from a sufficient number of observations.
- Suppose now the state space has dimension  $d$ , so that  $X_n \in \mathbb{R}^d$ , for example and consider the average behaviour of the system:

$$\begin{aligned}Y_n &= CX_n, \\X_{n+1} &= AX_n.\end{aligned}$$

- If we knew  $X_0$ , then the second equation would give us complete knowledge of the state at any time  $n \rightsquigarrow$  just need to determine  $X_0$ .

# Assumptions

- Since  $X_0$  has  $d$  unknowns, we expect to need  $d$  observations in order to determine  $X_0$ :

$$Y_0 = CX_0$$

$$Y_1 = CX_1 = CAX_0$$

$$\vdots$$

$$Y_{d-1} = CX_{d-1} = \cdots = CA^{d-1}X_0.$$

- Writing this in vector form,

$$[Y_0, \dots, Y_{d-1}]^T = [C, CA, CA^2, \dots, CA^{d-1}]^T X_0,$$

we see that this has a unique solution iff  $[C, CA, CA^2, \dots, CA^{d-1}]^T$  is invertible.

- In one dimension, this implies that  $C \neq 0$ .

# Assumptions

- Since  $X_0$  has  $d$  unknowns, we expect to need  $d$  observations in order to determine  $X_0$ :

$$Y_0 = CX_0$$

$$Y_1 = CX_1 = CA X_0$$

$$\vdots$$

$$Y_{d-1} = CX_{d-1} = \cdots = CA^{d-1} X_0.$$

- Writing this in vector form,

$$[Y_0, \dots, Y_{d-1}]^T = [C, CA, CA^2, \dots, CA^{d-1}]^T X_0,$$

we see that this has a unique solution iff  $[C, CA, CA^2, \dots, CA^{d-1}]^T$  is invertible.

- In one dimension, this implies that  $C \neq 0$ .

# Assumptions

- Since  $X_0$  has  $d$  unknowns, we expect to need  $d$  observations in order to determine  $X_0$ :

$$Y_0 = CX_0$$

$$Y_1 = CX_1 = CAX_0$$

$$\vdots$$

$$Y_{d-1} = CX_{d-1} = \cdots = CA^{d-1}X_0.$$

- Writing this in vector form,

$$[Y_0, \dots, Y_{d-1}]^T = [C, CA, CA^2, \dots, CA^{d-1}]^T X_0,$$

we see that this has a unique solution iff  $[C, CA, CA^2, \dots, CA^{d-1}]^T$  is invertible.

- In one dimension, this implies that  $C \neq 0$ .



# Assumptions

Recall the original system:

$$\begin{aligned}Y_n &= CX_n + DV_n, \\X_{n+1} &= AX_n + BW_{n+1}.\end{aligned}$$

## Definition (Kalman '60)

The system is said to be controllable if

$$[B, AB, A^2B, \dots, A^{d-1}B]$$

has column rank  $d$  where  $d$  is the dimension of the state space.

- Controllability says that any state  $x$  can be reached from any initial condition  $x_0$  in a finite number of steps.
- In one dimension, this implies that  $B \neq 0$ , i.e. it means that the state is affected by the noise  $W_n$ .

# Assumptions

Recall the original system:

$$\begin{aligned}Y_n &= CX_n + DV_n, \\X_{n+1} &= AX_n + BW_{n+1}.\end{aligned}$$

## Definition (Kalman '60)

The system is said to be controllable if

$$[B, AB, A^2B, \dots, A^{d-1}B]$$

has column rank  $d$  where  $d$  is the dimension of the state space.

- Controllability says that any state  $x$  can be reached from any initial condition  $x_0$  in a finite number of steps.
- In one dimension, this implies that  $B \neq 0$ , i.e. it means that the state is affected by the noise  $W_n$ .

# Assumptions

Recall the original system:

$$\begin{aligned}Y_n &= CX_n + DV_n, \\X_{n+1} &= AX_n + BW_{n+1}.\end{aligned}$$

## Definition (Kalman '60)

The system is said to be controllable if

$$[B, AB, A^2B, \dots, A^{d-1}B]$$

has column rank  $d$  where  $d$  is the dimension of the state space.

- Controllability says that any state  $x$  can be reached from any initial condition  $x_0$  in a finite number of steps.
- In one dimension, this implies that  $B \neq 0$ , i.e. it means that the state is affected by the noise  $W_n$ .

1 The Kalman filter

2 Ensemble Kalman filter (EnKF)

- The EnKF is a Monte Carlo implementation of the Kalman filter.
- Idea is to evolve the ensemble forward in time and estimate the mean and covariance from the evolved sample.
- “Why the EnKF works well with a small ensemble has remained a complete mystery.” A. J. Majda, X. T. Tong. Performance of ensemble Kalman filters in large dimensions. Communications on Pure and Applied Mathematics, vol. 71, no. 5, pp. 892–937 (2018)
- Fix  $N \geq 1$  and let  $\xi_{0,i}^-$ ,  $i = 1, \dots, N$  be i.i.d. copies of  $X_0 \sim \mathcal{N}(\hat{X}_0^-, \hat{P}_0^-)$ .
- For  $n \geq 1$ , let  $W_n^i$ ,  $i = 1, \dots, N$  be i.i.d. copies of  $W_n \sim \mathcal{N}(0, 1)$ . Similarly for  $V_n$ .

- The EnKF is a Monte Carlo implementation of the Kalman filter.
- Idea is to evolve the ensemble forward in time and estimate the mean and covariance from the evolved sample.
- “Why the EnKF works well with a small ensemble has remained a complete mystery.” A. J. Majda, X. T. Tong. Performance of ensemble Kalman filters in large dimensions. Communications on Pure and Applied Mathematics, vol. 71, no. 5, pp. 892–937 (2018)
- Fix  $N \geq 1$  and let  $\xi_{0,i}^-$ ,  $i = 1, \dots, N$  be i.i.d. copies of  $X_0 \sim \mathcal{N}(\hat{X}_0^-, \hat{P}_0^-)$ .
- For  $n \geq 1$ , let  $W_n^i$ ,  $i = 1, \dots, N$  be i.i.d. copies of  $W_n \sim \mathcal{N}(0, 1)$ . Similarly for  $V_n$ .

- The EnKF is a Monte Carlo implementation of the Kalman filter.
- Idea is to evolve the ensemble forward in time and estimate the mean and covariance from the evolved sample.
- “Why the EnKF works well with a small ensemble has remained a complete mystery.” A. J. Majda, X. T. Tong. Performance of ensemble Kalman filters in large dimensions. Communications on Pure and Applied Mathematics, vol. 71, no. 5, pp. 892–937 (2018)
- Fix  $N \geq 1$  and let  $\xi_{0,i}^-$ ,  $i = 1, \dots, N$  be i.i.d. copies of  $X_0 \sim \mathcal{N}(\hat{X}_0^-, \hat{P}_0^-)$ .
- For  $n \geq 1$ , let  $W_n^i$ ,  $i = 1, \dots, N$  be i.i.d. copies of  $W_n \sim \mathcal{N}(0, 1)$ . Similarly for  $V_n$ .

The EnKF algorithm is given by the following update-predict sequence:

$$\xi_{n,i} = \xi_{n,i}^- + g_n(Y_n + DV_n^i - C\xi_{n,i}^-), \quad (\text{update})$$

$$\xi_{n+1,i}^- = A\xi_{n,i} + BW_n^i, \quad (\text{predict})$$

where

$$g_n = Cp_n^-(C^2p_n^- + D^2)^{-1},$$

is the sample Kalman gain, and

$$m_n^- = \frac{1}{N} \sum_{i=1}^N \xi_{n,i}^- \quad \text{and} \quad p_n^- = \frac{1}{N-1} \sum_{i=1}^N (\xi_{n,i}^- - m_n^-)^2$$

are the prior sample mean and covariance, respectively.



Similarly, we can define the posterior sample mean and covariance

$$m_n = \frac{1}{N} \sum_{i=1}^N \xi_{n,i} \quad \text{and} \quad p_n = \frac{1}{N-1} \sum_{i=1}^N (\xi_{n,i} - m_n)^2.$$

Thus, we have the following update-predict steps of the EnKF

$$(m_n^-, p_n^-) \longrightarrow (m_n, p_n) \longrightarrow (m_{n+1}^-, p_{n+1}^-).$$

## Theorem (Le Gland et. al., '11, Mandel et. al. '11)

For each  $n \geq 0$ , as  $N \rightarrow \infty$ ,

$$m_n \rightarrow \hat{X}_n \quad \text{and} \quad p_n \rightarrow \hat{P}_n,$$

in  $L^p$  at rate  $1/\sqrt{N}$ , and almost surely.

## Theorem (Le Gland et. al. '11)

The EnKF does not converge to the optimal filter for non-linear or non-Gaussian filtering problems.

## Theorem (Del Moral, H., '22)

With initial conditions,

$$m_0^- = \hat{X}_0^- + \frac{1}{\sqrt{N+1}}v_0 \quad \text{and} \quad p_0^- = \hat{P}_0^- + \frac{1}{\sqrt{N}}v_0,$$

the ensemble Kalman filter update-predict transitions are as follows:

### 1 Update

$$m_n = m_n^- + g_n(Y_n - Cm_n^-) + \frac{1}{\sqrt{N+1}}v_n$$

$$p_n = (1 - g_n C)p_n^- + \frac{1}{\sqrt{N}}v_n,$$

### 2 Predict

$$m_{n+1}^- = Am_n + \frac{1}{\sqrt{N+1}}v_{n+1}^-$$

$$p_{n+1}^- = A^2 p_n + B^2 + \frac{1}{\sqrt{N}}v_{n+1}^-.$$

# Local perturbations

- The previous result implies that the sample variance,  $p_n^-$ , of the EnKF satisfies the stochastic Riccati rational difference equation

$$p_{n+1}^- = \phi(p_n^-) + \frac{1}{\sqrt{N}}\delta_{n+1},$$

where  $\delta_{n+1} = A^2\nu_n + \nu_{n+1}^-$ .

- Let  $\mathcal{P}(p, dq)$  denote the Markov transitions associated with the Markov chain  $(p_n^-)_{n \geq 0}$ , i.e.  $\mathcal{P}(p, dq) = \mathbb{P}[p_{n+1}^- \in dq | p_n = p]$ .

For suitable test functions, we write  $\mathcal{P}(f)(p) = \mathbb{E}[f(p_{n+1}^-) | p_n = p]$

- For a locally finite signed measure  $\mu$  on  $\mathbb{R}_+$  and functions  $f : \mathbb{R}_+ \rightarrow \mathbb{R}$ ,  $V : \mathbb{R}_+ \rightarrow \mathbb{R}_+$ , define

$$\|f\|_V = \sup_{p \geq 0} \left| \frac{f(p)}{\frac{1}{2} + V(p)} \right| \quad \text{and} \quad \|\mu\| := \sup\{|\mu(f)| : \|f\|_V \leq 1\}.$$

# Local perturbations

- The previous result implies that the sample variance,  $p_n^-$ , of the EnKF satisfies the stochastic Riccati rational difference equation

$$p_{n+1}^- = \phi(p_n^-) + \frac{1}{\sqrt{N}}\delta_{n+1},$$

where  $\delta_{n+1} = A^2\nu_n + \nu_{n+1}^-$ .

- Let  $\mathcal{P}(p, dq)$  denote the Markov transitions associated with the Markov chain  $(p_n^-)_{n \geq 0}$ , i.e.  $\mathcal{P}(p, dq) = \mathbb{P}[p_{n+1}^- \in dq | p_n = p]$ .

For suitable test functions, we write  $\mathcal{P}(f)(p) = \mathbb{E}[f(p_{n+1}^-) | p_n = p]$

- For a locally finite signed measure  $\mu$  on  $\mathbb{R}_+$  and functions  $f : \mathbb{R}_+ \rightarrow \mathbb{R}$ ,  $V : \mathbb{R}_+ \rightarrow \mathbb{R}_+$ , define

$$\|f\|_V = \sup_{p \geq 0} \left| \frac{f(p)}{\frac{1}{2} + V(p)} \right| \quad \text{and} \quad \|\mu\| := \sup\{|\mu(f)| : \|f\|_V \leq 1\}.$$

# Local perturbations

- The previous result implies that the sample variance,  $p_n^-$ , of the EnKF satisfies the stochastic Riccati rational difference equation

$$p_{n+1}^- = \phi(p_n^-) + \frac{1}{\sqrt{N}}\delta_{n+1},$$

where  $\delta_{n+1} = A^2\nu_n + \nu_{n+1}^-$ .

- Let  $\mathcal{P}(p, dq)$  denote the Markov transitions associated with the Markov chain  $(p_n^-)_{n \geq 0}$ , i.e.  $\mathcal{P}(p, dq) = \mathbb{P}[p_{n+1}^- \in dq | p_n = p]$ .

For suitable test functions, we write  $\mathcal{P}(f)(p) = \mathbb{E}[f(p_{n+1}^-) | p_n = p]$

- For a locally finite signed measure  $\mu$  on  $\mathbb{R}_+$  and functions  $f : \mathbb{R}_+ \rightarrow \mathbb{R}$ ,  $V : \mathbb{R}_+ \rightarrow \mathbb{R}_+$ , define

$$\|f\|_V = \sup_{p \geq 0} \left| \frac{f(p)}{\frac{1}{2} + V(p)} \right| \quad \text{and} \quad \|\mu\| := \sup\{|\mu(f)| : \|f\|_V \leq 1\}.$$

## Theorem (Del Moral, H., 2022)

There exists a unique invariant measure  $\pi$  such that  $\pi\mathcal{P} = \pi$ , a function  $\mathcal{U}$  and a constant  $\beta \in (0, 1)$  such that for any function  $f$  satisfying  $\|f\|_{\mathcal{U}} \leq 1$  and for any  $p \in \mathbb{R}_+$ , we have

$$|\mathcal{P}^n(f)(p) - \pi(f)| \leq \beta^n(1 + \mathcal{U}(p) + \pi(\mathcal{U})).$$

# Stability results: idea of proof

For a function  $V$ , define

$$\beta_V(\mathcal{P}) := \sup_{p, q \geq 0} \frac{\|\mathcal{P}(p, \cdot) - \mathcal{P}(q, \cdot)\|_V}{1 + V(p) + V(q)}$$

Now suppose we can first prove the following result.

## Proposition

There exists a function  $\mathcal{U} : \mathbb{R}_+ \rightarrow \mathbb{R}_+$  such that  $\beta_{\mathcal{U}}(\mathcal{P}) < 1$  and for any two probability measures  $\mu_1, \mu_2$ , we have

$$\|\mu_1 \mathcal{P}^n - \mu_2 \mathcal{P}^n\|_{\mathcal{U}} \leq \beta_{\mathcal{U}}(\mathcal{P})^n \|\mu_1 - \mu_2\|_{\mathcal{U}}.$$



# Stability results: idea of proof

For a function  $V$ , define

$$\beta_V(\mathcal{P}) := \sup_{p, q \geq 0} \frac{\|\mathcal{P}(p, \cdot) - \mathcal{P}(q, \cdot)\|_V}{1 + V(p) + V(q)}$$

Now suppose we can first prove the following result.

## Proposition

There exists a function  $\mathcal{U} : \mathbb{R}_+ \rightarrow \mathbb{R}_+$  such that  $\beta_{\mathcal{U}}(\mathcal{P}) < 1$  and for any two probability measures  $\mu_1, \mu_2$ , we have

$$\|\mu_1 \mathcal{P}^n - \mu_2 \mathcal{P}^n\|_{\mathcal{U}} \leq \beta_{\mathcal{U}}(\mathcal{P})^n \|\mu_1 - \mu_2\|_{\mathcal{U}}.$$

# Stability results: idea of proof

- The existence of a unique invariant (probability) measure  $\pi$  follows from the fixed point theorem.

- From the definition of  $\beta_{\mathcal{U}}(\mathcal{P})$ , we have

$$|\mathcal{P}^n(f)(p) - \mathcal{P}^n(f)(q)| \leq \beta_{\mathcal{U}}(\mathcal{P}^n)(1 + \mathcal{U}(p) + \mathcal{U}(q)).$$

- Then

$$\begin{aligned} |\mathcal{P}^n(f)(p) - \pi(f)| &= |\mathcal{P}^n(f)(p) - \pi \mathcal{P}(f)| \\ &= \left| \int_0^\infty \pi(dq) (\mathcal{P}^n(f)(p) - \mathcal{P}^n(f)(q)) \right| \\ &\leq \int_0^\infty \pi(dq) |\mathcal{P}^n(f)(p) - \mathcal{P}^n(f)(q)| \\ &\leq \beta_{\mathcal{U}}(\mathcal{P}^n)(1 + \mathcal{U}(p) + \pi(\mathcal{U})) \\ &\leq \beta_{\mathcal{U}}(\mathcal{P})^n(1 + \mathcal{U}(p) + \pi(\mathcal{U})) \end{aligned}$$

# Stability results: idea of proof

- The existence of a unique invariant (probability) measure  $\pi$  follows from the fixed point theorem.

- From the definition of  $\beta_{\mathcal{U}}(\mathcal{P})$ , we have

$$|\mathcal{P}^n(f)(p) - \mathcal{P}^n(f)(q)| \leq \beta_{\mathcal{U}}(\mathcal{P}^n)(1 + \mathcal{U}(p) + \mathcal{U}(q)).$$

- Then

$$\begin{aligned} |\mathcal{P}^n(f)(p) - \pi(f)| &= |\mathcal{P}^n(f)(p) - \pi \mathcal{P}(f)| \\ &= \left| \int_0^\infty \pi(dq) (\mathcal{P}^n(f)(p) - \mathcal{P}^n(f)(q)) \right| \\ &\leq \int_0^\infty \pi(dq) |\mathcal{P}^n(f)(p) - \mathcal{P}^n(f)(q)| \\ &\leq \beta_{\mathcal{U}}(\mathcal{P}^n)(1 + \mathcal{U}(p) + \pi(\mathcal{U})) \\ &\leq \beta_{\mathcal{U}}(\mathcal{P})^n(1 + \mathcal{U}(p) + \pi(\mathcal{U})) \end{aligned}$$

# Stability results: idea of proof

- The existence of a unique invariant (probability) measure  $\pi$  follows from the fixed point theorem.

- From the definition of  $\beta_{\mathcal{U}}(\mathcal{P})$ , we have

$$|\mathcal{P}^n(f)(p) - \mathcal{P}^n(f)(q)| \leq \beta_{\mathcal{U}}(\mathcal{P}^n)(1 + \mathcal{U}(p) + \mathcal{U}(q)).$$

- Then

$$\begin{aligned} |\mathcal{P}^n(f)(p) - \pi(f)| &= |\mathcal{P}^n(f)(p) - \pi \mathcal{P}(f)| \\ &= \left| \int_0^\infty \pi(dq) (\mathcal{P}^n(f)(p) - \mathcal{P}^n(f)(q)) \right| \\ &\leq \int_0^\infty \pi(dq) |\mathcal{P}^n(f)(p) - \mathcal{P}^n(f)(q)| \\ &\leq \beta_{\mathcal{U}}(\mathcal{P}^n)(1 + \mathcal{U}(p) + \pi(\mathcal{U})) \\ &\leq \beta_{\mathcal{U}}(\mathcal{P})^n(1 + \mathcal{U}(p) + \pi(\mathcal{U})) \end{aligned}$$

# Stability results: idea of proof

To prove the auxiliary result, it is sufficient to prove the following.

- For any compact set  $K \subset \mathbb{R}_+$ , there exists a constant  $\varepsilon_K \in (0, 1]$  and a probability measure  $\nu_K$  on  $\mathbb{R}_+$  such that for all  $p \in K$ ,

$$\mathcal{P}(p, dq) \geq \varepsilon_K \nu_K(dq).$$

- There exists a non-negative function  $\mathcal{U} : \mathbb{R}_+ \rightarrow [1, \infty)$  with compact level sets, such that

$$\mathcal{P}(\mathcal{U}) \leq \varepsilon \mathcal{U} + c,$$

for some  $\varepsilon \in [0, 1)$  and  $c < \infty$ .

## Theorem (Del Moral, H., 2022)

For any  $k \geq 1$ , there exists an integer  $N_k \geq 1$  such that for any  $N \geq N_k$  and  $n \geq 0$ , we have

$$\mathbb{E} \left[ |p_n^- - \hat{P}_n^-|^k \right]^{1/k} \vee \mathbb{E} \left[ |p_n - \hat{P}_n|^k \right]^{1/k} \vee \mathbb{E} \left[ |g_n - \hat{G}_n|^k \right]^{1/k} \leq \frac{C_k(1 \vee P_0)}{\sqrt{N}}.$$

# Central Limit Theorem

Define the collection of stochastic processes  $(\mathbb{Q}_{N,n}^-, \mathbb{Q}_{N,n+1})_{n \geq 0}$  defined via

$$\mathbb{Q}_{N,n}^- := \sqrt{N}(p_n^- - \hat{P}_n^-) \quad \text{and} \quad \mathbb{Q}_{N,n} := \sqrt{N}(p_n - \hat{P}_n).$$

## Theorem (Del Moral, H., 2022)

The stochastic processes  $(\mathbb{Q}_{N,n}, \mathbb{Q}_{N,n+1}^-)$  converge in law in the sense of f.d.d., as the number of particles  $N \rightarrow \infty$ , to a sequence of centred stochastic processes  $(\mathbb{Q}_n, \mathbb{Q}_{n+1}^-)$  with initial condition  $\mathbb{Q}_0^- = \mathbb{V}_0^-$  and update-predict transitions given by

$$\begin{aligned}\mathbb{Q}_n &= (1 - G_n C) \mathbb{Q}_n^- + \mathbb{V}_n \\ \mathbb{Q}_{n+1}^- &= A \mathbb{Q}_n + \mathbb{V}_{n+1}^-.\end{aligned}$$

# Idea behind the proofs

- Let us consider  $p_n^- - \hat{P}_n^-$ . The idea is to write this difference as a telescoping sum involving the increments of the Markov chain  $(p_n^-)_{n \geq 1}$  and show that we can control these increments nicely.

- Recall from the evolution equation for  $p_n^-$ , the increments are related to the Riccati map

$$\phi(x) = \frac{ax + b}{cx + d}, \quad x \geq 0.$$

- Thus, we first need to look at the behaviour of these maps...



# Idea behind the proofs

- Let us consider  $p_n^- - \hat{P}_n^-$ . The idea is to write this difference as a telescoping sum involving the increments of the Markov chain  $(p_n^-)_{n \geq 1}$  and show that we can control these increments nicely.
- Recall from the evolution equation for  $p_n^-$ , the increments are related to the Riccati map

$$\phi(x) = \frac{ax + b}{cx + d}, \quad x \geq 0.$$

- Thus, we first need to look at the behaviour of these maps...

# Idea behind the proofs

- Let us consider  $p_n^- - \hat{P}_n^-$ . The idea is to write this difference as a telescoping sum involving the increments of the Markov chain  $(p_n^-)_{n \geq 1}$  and show that we can control these increments nicely.
- Recall from the evolution equation for  $p_n^-$ , the increments are related to the Riccati map

$$\phi(x) = \frac{ax + b}{cx + d}, \quad x \geq 0.$$

- Thus, we first need to look at the behaviour of these maps...

# Idea behind proofs : Riccati maps

## Lemma (Del Moral, H., 2022)

(i) For any  $n \geq 1$ ,  $b/d \leq \phi^n(x) \leq a/c$ .

(ii) We have the Lipschitz estimates

$$|\phi^n(x) - \phi^n(y)| \leq C_1 \lambda^n |x - y| \quad \text{and} \quad |\partial \phi^n(x) - \partial \phi^n(y)| \leq C_2 \lambda^n |x - y|,$$

where  $C_1, C_2 > 0$  and  $\lambda \in (0, 1)$ .

(iii) Finally, we have the second order estimate

$$|\phi^n(x) - \phi^n(y) - \partial \phi^n(y)(x - y)| \leq C_3 \lambda^n |x - y|^2,$$

where  $C_3 > 0$ .

# Idea behind proofs : Riccati maps

- A.N. Bishop and P. Del Moral. On the stability of Kalman-Bucy diffusion processes. SIAM Journal on Control and Optimization. vol. 55, no. 6. pp 4015–4047 (2017); arxiv e-print arXiv:1610.04686.
- A.N. Bishop and P. Del Moral. An explicit Floquet-type representation of Riccati aperiodic exponential semigroups. International Journal of Control, pp. 1–9 (2019).
- P. Del Moral and E. Horton. A note on Riccati matrix difference equations. SIAM J. Control Optim., 60(3), pp. 1393-1409 (2022).

# Idea behind proofs

- Consider the following decomposition

$$p_n^- - \hat{P}_n^- = \phi^n(p_0^-) - \phi^n(\hat{P}_0^-) + \sum_{k=1}^n \left( \phi^{n-k}(p_k^-) - \phi^{n-(k-1)}(p_{k-1}^-) \right).$$

- Use the Lipschitz estimates for  $\phi^n$  to obtain bounds on the summands for the moment estimates.
- The CLT requires more delicate treatment: need to use the second order Taylor expansion type bounds and then the Lipschitz estimates for the first derivative.

# Idea behind proofs

- Consider the following decomposition

$$p_n^- - \hat{P}_n^- = \phi^n(p_0^-) - \phi^n(\hat{P}_0^-) + \sum_{k=1}^n \left( \phi^{n-k}(p_k^-) - \phi^{n-(k-1)}(p_{k-1}^-) \right).$$

- Use the Lipschitz estimates for  $\phi^n$  to obtain bounds on the summands for the moment estimates.
- The CLT requires more delicate treatment: need to use the second order Taylor expansion type bounds and then the Lipschitz estimates for the first derivative.

- Consider the following decomposition

$$p_n^- - \hat{P}_n^- = \phi^n(p_0^-) - \phi^n(\hat{P}_0^-) + \sum_{k=1}^n \left( \phi^{n-k}(p_k^-) - \phi^{n-(k-1)}(p_{k-1}^-) \right).$$

- Use the Lipschitz estimates for  $\phi^n$  to obtain bounds on the summands for the moment estimates.
- The CLT requires more delicate treatment: need to use the second order Taylor expansion type bounds and then the Lipschitz estimates for the first derivative.

# Stability of the sample means

- Now define  $M_n := m_n - X_n$ .

- Observe that

$$M_{n+1} = \frac{A}{1 + (C/D)^2 p_n} M_n + \Upsilon_{n+1},$$

where  $\Upsilon_n$  is a conditionally centred Gaussian random variable.

- Understanding the stability of the sample means thus reduces to understanding the behaviour of the products

$$\mathcal{E}_{l,n} := \prod_{k=l}^n \frac{A}{1 + (C/D)^2 p_k}.$$

- Similar theorems to those presented for the sample covariances and the corresponding Kalman gain hold for  $M_n$ .



# Stability of the sample means

- Now define  $M_n := m_n - X_n$ .

- Observe that

$$M_{n+1} = \frac{A}{1 + (C/D)^2 p_n} M_n + \Upsilon_{n+1},$$

where  $\Upsilon_n$  is a conditionally centred Gaussian random variable.

- Understanding the stability of the sample means thus reduces to understanding the behaviour of the products

$$\mathcal{E}_{l,n} := \prod_{k=l}^n \frac{A}{1 + (C/D)^2 p_k}.$$

- Similar theorems to those presented for the sample covariances and the corresponding Kalman gain hold for  $M_n$ .

# Stability of the sample means

- Now define  $M_n := m_n - X_n$ .

- Observe that

$$M_{n+1} = \frac{A}{1 + (C/D)^2 p_n} M_n + \Upsilon_{n+1},$$

where  $\Upsilon_n$  is a conditionally centred Gaussian random variable.

- Understanding the stability of the sample means thus reduces to understanding the behaviour of the products

$$\mathcal{E}_{l,n} := \prod_{k=l}^n \frac{A}{1 + (C/D)^2 p_k}.$$

- Similar theorems to those presented for the sample covariances and the corresponding Kalman gain hold for  $M_n$ .

# Stability of the sample means

- Now define  $M_n := m_n - X_n$ .

- Observe that

$$M_{n+1} = \frac{A}{1 + (C/D)^2 p_n} M_n + \Upsilon_{n+1},$$

where  $\Upsilon_n$  is a conditionally centred Gaussian random variable.

- Understanding the stability of the sample means thus reduces to understanding the behaviour of the products

$$\mathcal{E}_{l,n} := \prod_{k=l}^n \frac{A}{1 + (C/D)^2 p_k}.$$

- Similar theorems to those presented for the sample covariances and the corresponding Kalman gain hold for  $M_n$ .

# Future work/open problems

- Higher dimensions
- Stability analysis for unstable signals for other genetic-type particle filters
- Time-varying systems
- Genealogies of particle filters
- Plenty of other particle filters..!

Thank you!